

REZNOR®

Trusted Heating Solutions


.....

Quartz Glow

Electric Radiant Heaters

.....



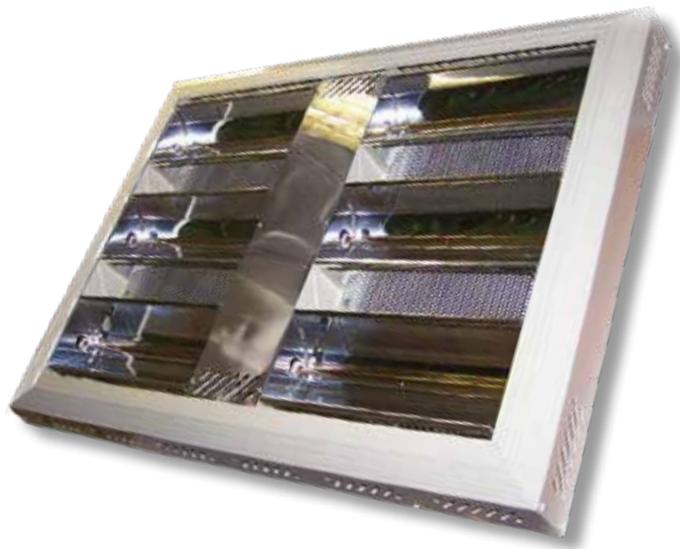


Quartz Glow

Electric Radiant Heaters

The Quartz Glow range provide instant high frequency infra-red heat, which is focused exactly where required.

Quartz Glow incorporate the latest shortwave heating technology, giving energy efficient ways to heat people indoors or outside.

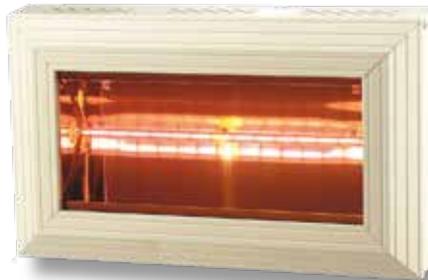

Model Range

There are three Quartz Glow ranges:

- The Apollo range of indoor heaters designed to suit all industrial and commercial situations and heat requirements
- The Sorrento range is a robust weatherproof heater
- The Titan range, ideal for emergency or 'spot' heating. Comes in static or mobile versions

Apollo Range

| Model | Heat Input kW | Description | Dimensions | Mounting height (m) |
|----------|---------------|---------------------------------|------------------|---------------------|
| QH 15-1 | 1.5 | Single tube | 402 x 227 x 112 | 2.1 to 4.0 |
| QH 30-1 | 3.0 | Double tube | 790 x 227 x 112 | 3.0 to 4.5 |
| QH 45-1 | 4.5 | Triple tube | 1178 x 227 x 112 | 3.5 to 5.5 |
| QH 45-3 | 4.5 | Triple tube - 3ph | 422 x 525 x 110 | 3.5 to 5.5 |
| QHL 30-1 | 3.0 | Double linear tube | 857 x 255 x 110 | 3.0 to 4.5 |
| QHL 45-1 | 4.5 | Triple linear tube | 1282 x 255 x 110 | 3.5 to 5.5 |
| QHL 45-3 | 4.5 | Triple linear tube (3ph) | 1282 x 255 x 110 | 3.5 to 5.5 |
| QHL 90-3 | 9.0 | Triple double linear tube (3ph) | 857 x 630 x 110 | 5.0 to 7.0 |

The Apollo range of indoor heaters, manufactured from extruded aluminium, offers a choice of power options 1.5kW - 9kW to suit all situations and requirements. They are adjustable both vertically and horizontally for accurate heat placement. Safety guards are available where required.

The Apollo range is ideal for:

- Churches
- Factories
- Farming and horticulture
- Garages and workshops

Sorrento Range

The Sorrento range is a robust weatherproof heater (IP24 rated). The range is a premium versatile heater that is also available in a double or triple option and can be grouped together horizontally and vertically making it suitable for countless applications.

The Sorrento range is ideal for:

- Churches
- Horticulture
- Garages
- Restaurants and bars
- Workshops

| Model | Heat Input kW | Description | Dimensions | Mounting height (m) |
|----------|---------------|--------------------|------------------|---------------------|
| SOR 15 | 1.5 | Single tube | 402 x 227 x 112 | 2 |
| SORDL 30 | 3.0 | Double linear tube | 790 x 227 x 112 | 2.5 - 4.0 |
| SORTL 45 | 4.5 | Triple linear tube | 1178 x 227 x 112 | 2.5 - 4.0 |



Titan Range

| Model | Heat Input kW | Description | Dimensions |
|---------|---------------|---------------|------------------|
| TI-STAT | 3.0 | Static heater | 650 x 430 x 200 |
| TI-MOB | 3.0 | Mobile heater | 1140 x 650 x 650 |

The Titan range offers efficient and reliable emergency or 'spot' heating. Both the mobile and static versions of the Titan are fitted with an anti-tilt device to prevent misuse or accidents on site. The Titan mobile also has lockable front wheels, further enhancing its safety.

The Titan range is ideal for:

- Building and construction
- Emergency heating
- Garages and workshops
- Paint curing
- Paint and plaster drying



Other products in the Reznor range:-

- Warm air heaters
- Radiant heating
- Destratification fans
- Heating & ventilation units
- Packaged rooftop units
- Air induction systems
- Gas fired heater modules
- Evaporative cooling



Registered in England No. 01390934 | Registered Office The Colmore Building, Colmore Circus Queensway Birmingham B4 6A
Nortek Global HVAC is a registered trademark of Nortek Global HVAC Limited. Because of continuous product innovation, Nortek Global HVAC reserves the right to change product specification without due notice.

NORTEK GLOBAL HVAC (UK) LTD
Fens Pool Avenue
Brierley Hill
West Midlands DY5 1QA
United Kingdom

Tel: +44 (0)1384 489 250
Fax: +44 (0)1384 489 707

reznorsales@nortek.com
www.reznor.eu